


Tango Series

A POS Terminal that Inspires You to Explore
New Opportunities and Embrace the Change



Fit Any Store Settings

Modern & Harmony Industrial Design

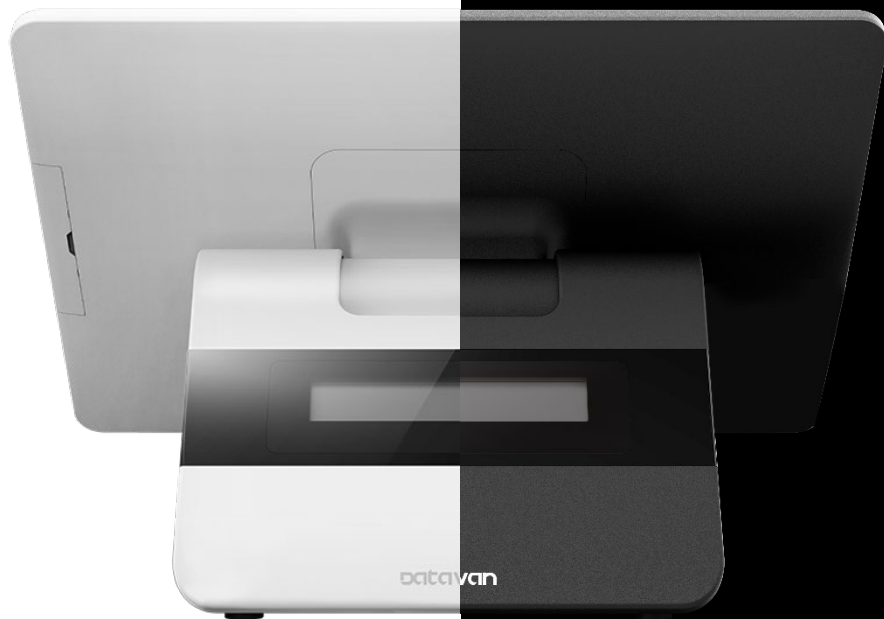

Color Options



Detail Makes Difference



Redefine the Way You Engage Customers



FLIP-OVER DESIGN

Unified User Interface Across Device

16:9
widescreen



Adapt To Ever Changing Needs

Add The Functions Or Change The Modules With Ease.




Management



Customer
Display



Barcode
Reading



2D Imager
Tango Scan



10" 2nd Lcd Display ▶
Tango View



VFD Customer Display
Tango View

◀ Msr
3-track MSR




Identification Reader
Ibutton/Fingerprint/Rfid


Tango Scan

2D Imager

Meet omnichannel marketing strategies and increase business productivity.



Passes & Tickets



Mobile Wallet



Mobile Coupons



Loyalty Cards



Information Capture



Make Brands Shine Brighter

Adding Colors and Logos to Your Branded Environment

Oem
Service

Color
Matching
Service



Application

Serve business of all sizes and provide optimal productivity.



Point Of Engagement

Point Of Service



Point Of Sale



Secure Payment




T-415W Specifications

Model number		T-415W
System	Processor	Rockchip RK3288 Quad-core Cortex-A17 1.8 GHz
	OS	Android 7.1
	Memory	Onboard DDR3 2GB / 4GB
	Storage	eMMC 16GB / 32GB
LCD	LCD	15.6" LED-backlit display
	Resolution	1366 x 768 Pixel
	Brightness	220 cd/m ²
Touch	Touch	True-flat Projected Capacitive Touch (10 Point multi-touch)
IO	USB	4 x USB 2.0 / 1 x USB OTG
	Serial Port	2 x DB-9 Type (M)
	LAN	1 x RJ-45 Gigabit LAN
	Line out	1 x Phone Jack
	MIC in	1 x Phone Jack
	HDMI	1 x HDMI V.1.4
	Cash drawer port	1 x RJ-12 (12V Cash drawer support only)
	Speaker	2 x 1W speaker
Extension slot	1 x SD Card slot (Up to 128GB)	
Power	Adapter	External DC power adapter 60W, 12V/ 5A

T-615W T-815W Specifications

	Model number	T-615W	T-815W
System	Processor	Intel® Celeron® J1900 Quad-core Processor up to 2.4GHz (burst)	Intel® Skylake U Processors Celeron® 3955U 2.0GHz Core™ i3-6100U 2.3GHz Core™ i5-6300U 2.4GHz
	OS	Windows 10 / Linux Kernel 3.0 or above	
	Main Memory	1x DDR3L SO-DIMM up to 8GB	1x DDR3L SO-DIMM up to 16 GB
	Storage	1 x 2.5" SATA HDD or 1 x 2.5" S-ATA SSD	
LCD	LCD Panel	15.6" LED-backlit display	
	Resolution	1366 x 768 Pixel	
	Brightness	220 cd/m ²	
Touch	Touch Screen	True-flat Projected Capacitive Touch (10 Point multi-touch)	
I/O	USB2.0 / 3.0	5 x USB2.0, 2 x USB3.0	
	Serial Port	2 DC 5V/12V output, setting by BIOS	
	LAN	1 x RJ-45 Gigabit LAN	
	HDMI	1 x HDMI V.1.4	
	RJ12	1 x RJ12	
	Cash drawer port	*12V/24 selectable, setting by jumper (default 24V) OPOS driver& dual cash drawer support	
	Speaker output	2 * 1W speaker	
	Line out	1 (Optional)	
	MIC in	1 (Optional)	
	DC12V output	1 (Optional)	
Power	Adapter	External DC power adapter 65W, 19V/3.4A	
Safety & Environment	Product Certification	CE / FCC / CCC / LVD certificated	
	Operation Temperature	0°C to 40°C	
	Storage Temperature	-25°C to 70°C	

360° Customer Engagement

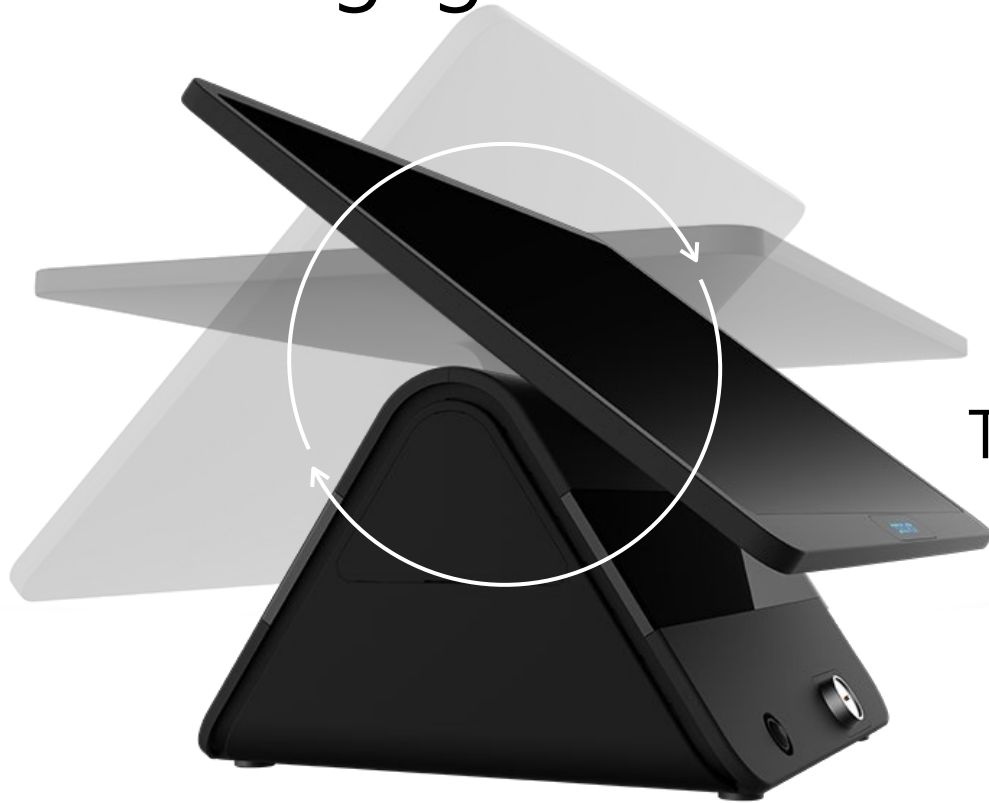

Tango Series