

# WVP-T21 KDS

## 21.5" Light Industrial Panel PC

Intel® Celeron Processor




## Features and Benefits

- / Onboard Intel® Elkhart Lake Celeron J6412, 2.6GHz.
- / 10 points PCAP multi-touch support.
- / 3 x USB3.1, 3 x USB 2.0, 2 x COM, 1 x DP (by USB-C), 1 x LAN, 1 x CD
- / Intel F/W TPM.
- / Front IP55, Fanless System & VESA Compliance.
- / WIFI/BT module (Project based).
- / Extension Module design (Project based).

# Specification

Model Name	WP-T21	
System Information	Processor	Intel® Celeron J6412
	System Memory	1 x SO-DIMM DDR4 slot, 8GB RAM as standard. Max. memory support up to 16GB.
	TPM	Intel F/W
Display & Touch	LCD Size	21.5"
	Display Type	Full HD
	Resolution	1920x1080
	Luminance	250cd/m <sup>2</sup>
	Backlight	LED
	Touch Type	Projective Capacitive
	Touch Controller	USB touch
Storage	1 x M.2 SSD	
Expansion	1 x M.2 M Key	
	1 x M.2 A,E Key (for WiFi/BT project based)	
Display	Graphic Chipset	Intel® 10th Gen integrated Graphics
	USB Port	3 x USB 3.1 3 x USB 2.0
I/O	COM Port	2 x RJ-48 (Support DC+0/5/12V by BIOS default is 0V)
	DP	1 x DP (USB-C)
	Cash Drawer	1 x RJ11 (Support DC+12V or 24V(default)port, support 2 cash drawers)
	Audio	Audio Codec: Realtek Speaker Output: 2 x 2W
Certification Information	CE / FCC Class B	
Ethernet	LAN Chipset	Gigabit-LAN: support WOL, PXE
	Ethernet Interface	10/100/1000 Base-Tx GbE compatible
	LAN Port	1 x RJ-45
Power Requirement	DC Input Connector	4 pin DIN
	Adapter	Input: 100 ~ 240Vac/ 50 ~ 60Hz Output: 65W Adapter (19V Adapter) AC-DC Adapter
Mechanical & Environmental	Operating Temperature	0°C ~ 40°C
	Storage Temperature	-20°C ~ 60°C
	Operating Humidity	10% ~ 90% Relative Humidity, Non-condensing
	Weight	5.8 Kg
	IP Rating	Front IP55
	Mounting Kit	Wall / Stand / VESA 75mm x 75mm
	System Fan	Fanless
	Construction - Front	Metal- black
	Construction - Rear	Metal- black
	Dimension	509 x 305 x 48 mm
	Fanless	Yes
OS Support	Win 10, Linux	
Extension Module (Project Based)	Type A	USB X 2, COM X 2
	Type B	PUSB 12V X 2, PUSB 24V X 1

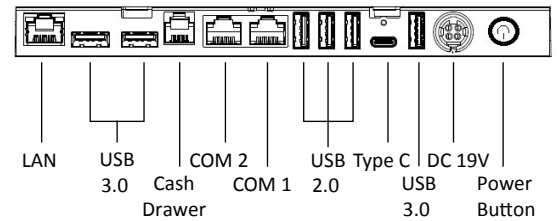

Retail



Hospitality

## Contact

<http://www.poindus.com>

### Poindus Systems Corp.

Taiwan (HQ) | Germany | UK | Iberica

5F., No. 59, Ln. 77, Xing-Ai Rd., Neihu Dist., Taipei City 114, Taiwan. R.O.C.

☎ +886 2 7721 4688 🖨 +886 2 7721 2289 ✉ sales@poindus.com

**Poindus**  
COMPAL GROUP