


XP-Q304F

Thermal Barcode Printer

Xprinter®

XP-Q304F

Thermal Barcode Printer



Receipt &
label printer
with fashionable
design




Label mode

Receipt mode



- Support missing paper alarm function



- Label mode: 80mm
Receipt mode: 72mm




- Paper roll diameter: 100mm Max.



- Support IAP online upgrade



- Support QR CODE

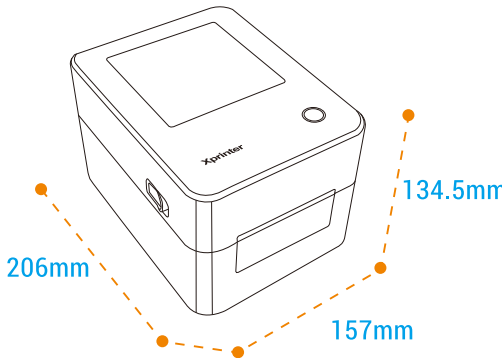

Model XP-Q304F		
Print mode	Label print mode	Receipt print mode
Printing method	Direct Thermal	
Resolution	203 DPI	203 DPI
Max.print speed	152 mm/s	200 mm/s
Max.print width	80 mm	72 mm
RAM	4M	
Flash	4M	
Interfaces	USB / USB+Bluetooth (Optional: USB+WiFi / USB+Lan / USB+Serial+Lan)	
Sensor	Paper detection/Lid opening detection/ Gap detection	Paper detection/ Lid opening detection
Media		
Media type	Thermal continuous paper, thermal label gap paper, black label paper	Thermal continuous paper
Media width	20~80 mm	80 mm
Media roll diameter	100 mm	100 mm
Paper taken method	Tearing off	Tearing off
Media thickness	0.12mm-0.20mm	0.06mm-0.08mm
Fonts/Graphics/Symbologies		
Barcode	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128/ QR CODE	UPC-A/UPC-E/JAN13 (EAN13) / JAN8(EAN8)/CODE39/ITF/ CODABAR/CODE93/CODE128/ QR CODE
Character sizes	FONT 1 to FONT 8	Font A:1.5mm×3.0mm(12×24 dots) Font B:1.1mm×2.1mm(9×17 dots) Chinese:3.0mm×3.0mm(24×24 dots)
Emulation	TSPL	ESC / POS
Physical Features		
Dimension	206mm*157mm*134.5mm(D*W*H)	
Weight	1.42 kg	
Operation	5 ~ 45℃, Humidity: 20 ~ 80%	
Storage environment	-10 ~ 60℃, Humidity: 10 ~ 90%	
Power Input	DC 24V / 1.5A	
Cash drawer	DC 24V / 1A	
Print head life	100 KM	
Operating system	WINDOWS/ Android / IOS	



Scan QR code to checkout Xprinter
website for more update information.
Phone: (+86 756) 3895 852
Http://www.xprintertech.com
Email: overseas@xprinter.net

